




UHF RFID

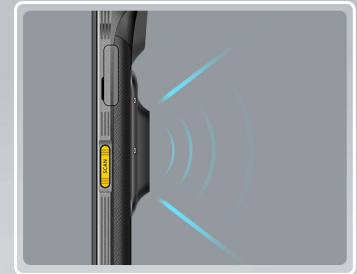

C71

Mobile Computer UHF RFID

- | | | | | | |
|------------|------|------|-----------|-----|------------|
| | | | | | |
| Android | 4G | WiFi | Bluetooth | UHF | 1D Barcode |
| | | | | | |
| 2D Barcode | IRIS | NFC | Camera | GPS | |

Chainway C71 is an Android rugged mobile computer. It can be configured with internal UHF module with 1dBi circularly polarized antenna. With its powerful quadcore processor and wireless connections, you can find this easy-to-deploy device an exceptionally valuable helper to increase working efficiency and productivity in retail, logistics and healthcare.



Specification

Physical Characteristics

Dimensions	164.2*78.8*17.5mm/6.46*3.10*0.69in
Weight	<321g/11.32oz
Display	5.2" IPS FHD 1920x1080
Touch Panel	Corning Gorilla Glass, multi-touch panel, gloves and wet hands supported
Power	Main battery: Li-ion, rechargeable, 5000mAh
	Standby: over 350 hours
	Continuous use: over 12 hours (depending on user environment)
	Charging time: 3-4 hours (with standard adaptor and USB cable)
Expansion Slot	1 slot for SIM card, 1 slot for SIM or TF card
Interfaces	USB 2.0 Type-C, OTG
Audio	Speaker, 2 microphones
Keypad	4 front keys, 1 power key, 2 scan keys, 1 multifunctional key
Sensors	Gravity sensor, light sensor, proximity sensor, vibration motor

Performance

CPU	Cortex-A53 Quad-core 1.45GHz
RAM+ROM	2GB+16GB
Expansion	Supports up to 128 GB Micro SD card

Developing Environment

Operating System	Android 6.0
SDK	Chainway Development Kit
Language	Java
Tool	Eclipse / Android Studio

User Environment

Operating Temp.	-4°F to 122°F / -20°C to 50°C
Storage Temp.	-40°F to 158°F / -40°C to 70°C
Humidity	5%RH - 95%RH non condensing
Drop Specification	Multiple 1.8m/5.9ft drops (at least 20 times) to the concrete across the operating temperature range
Tumble Specification	1000 x 0.5m/1.6ft falls at room temperature
Sealing	IP65 per IEC sealing specifications
ESD	±15KV air discharge, ±6KV conductive discharge

Communication

WLAN	IEEE802.11 a/b/g/n, 2.4G/5G dual-band, internal antenna
WWAN(Europe)	2G: 850/900/1800/1900MHz
	3G: 850/900/1900/2100MHz
	4G: B1, B3, B5, B7, B8, B20, B40
WWAN(America)	2G: 850/900/1800/1900MHz
	3G: 850/900/1700/1900MHz
	4G: B2, B4, B7, B12, B17

WWAN (China)	2G: 900/1800MHz
	3G: 900/1900/2000/2100MHz
	4G: B1, B3, B5, B38, B39, B40, B41
WWAN (Others)	Depending on the country's ISP
Bluetooth	Bluetooth 4.0, BLE
GNSS	GPS/AGPS, GLONASS, BeiDou; internal antenna

Data Collection

UHF RFID

Frequency	865MHz-868MHz / 920-925MHz / 902-928MHz
Protocol	EPC C1 GEN2 / ISO18000-6C
Antenna	Circular polarization (1dB)
Power	1W (27dBm, +19dBm to +30dBm adjustable)
R/W range	1m

* Ranges and rates depend on tags and environment

Camera

Rear Camera	13MP Autofocus with flash
Front Camera (optional)	5MP camera

NFC

Frequency	13.56MHz
Protocol	ISO14443A/B, ISO15693, NFC-IP1, NFC-IP2, etc.
Chips	M1 card (S50, S70), CPU card, NFC tags, etc.
Range	2-4cm

Barcode Scanning (optional)

1D Linear Scanner	Zebra SE965 / Honeywell N4313
1D Symbologies	UPC/EAN, Code128, Code39, Code93, Code11, Interleaved 2 of 5, Discrete 2 of 5, Chinese 2 of 5, Codabar, MSI, RSS, etc.
2D Imager Scanner	Zebra: SE4710 / SE4750 / SE4750MR; Honeywell: N6603
2D Symbologies	PDF417, MicroPDF417, Composite, RSS, TLC-39, Datamatrix, QR code, Micro QR code, Aztec, MaxiCode; Postal Codes: US PostNet, US Planet, UK Postal, Australian Postal, Japan Postal, Dutch Postal (KIX), etc.

Iris (optional)

Rate	<150ms
Range	20-40cm
FAR	1/10000000
Protocol	ISO/IEC 19794-6, GB/T 20979-2007

Accessories(See details in Accessory Guide)



Cradle (Optional)



AC Adaptor



USB Cable



Holster

Notice: Product specifications are subject to change without prior notice. / Model: C71 UHF / Update Date: 2018-10-18

CHAINWAY[®]

Shenzhen Chainway Information Technology Co., Ltd

Address: 9F, Building2, Phase 2, Gaoxinqi Industrial Park, Liuxian 1st Rd., Bao'an District, Shenzhen, Guangdong 518102, China

Tel: 0086-755-23223316

Fax: 0086-755-23223310

Email: sales@chainway.cn

Web: <http://www.chainway.net>